

## 22 inch - Technical Specifications

### DESIGN

#### Tool Attributes

Odometer Channels	2
Odometer Resolution	500 times a second sampling
Data Storage	Flash Data Storage, expandable
Inertial Mapping	GIS/GPS Mapping & Geospatial Reporting

DATA SETS (# Sensors)		OPERATIONAL	
Caliper	18	Max. Pressure	1875 psi (12928 kPa)
Gyros	3	Temp. Range	32 to 170 °F (0 to 77 °C)
Accelerometers	3	Velocity	≈ 0.1 to 10 mph (0.04 to 4.0 m/s)
		Required Differential Pressure	5 to 25 psi (34 to 172 kPa)

PIPELINE GEOMETRY REQUIREMENTS	in (mm)
Minimum Local Bore	25% of pipe O.D.
Min. Bend Radius	1.5D
Min. Bend Separation	Capable of back to back bends

IMU SPECIFICATIONS @ 3 to 8 mph (1.3 to 3.6 m/s)		DIMENSIONS	
		Length	37.45 in (952 mm)
		Weight	348.01 lb (158 kg)
		<b>TOOL RANGE</b>	
		* Run Time	173 hours

### REPORTING

#### Dent/Ovality Sizing

Dent Depth Sizing	± 0.5% of Pipe O.D.
Dent Length Sizing	± 10% of Pipe O.D.
Ovality Depth Sizing	± 0.5% of Pipe O.D.

#### Bend Measurement

Angle Accuracy	± 2 degrees
----------------	-------------

#### Location Accuracy


Feature to Upstream Girth Weld	± 1.00 (25)
Feature to Upstream Marker	± 60.00 (1524)
Feature Orientation	± 15 degrees

#### Axial Sampling

1.5 inches (depending on line condition, tool speed, and line length).

#### Notes:

SUGGESTED MINIMUM TRAP DIMENSIONS in (mm)								
Traps	A	B	C	D	E	F	G	H
Launcher	49 (1245)	19 (483)	18 (457)	24 (610)	70 (1778)	109 (2769)	22 (559)	6 (152)
Receiver	49 (1245)	49 (1245)	18 (457)	24 (610)	70 (1778)	109 (2769)	22 (559)	6 (152)

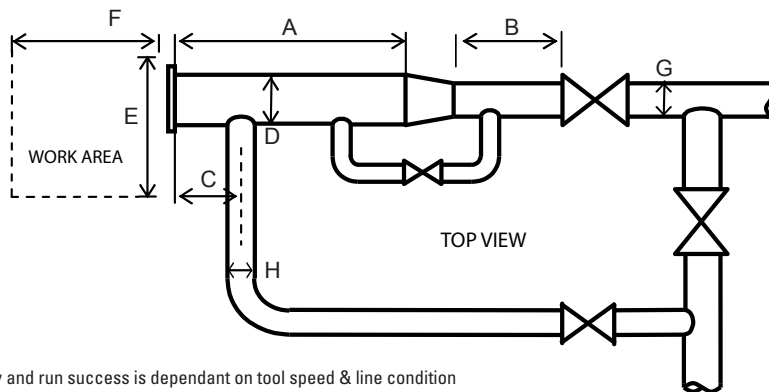

#### Notes:

- Data quality and run success is dependant on tool speed & line condition
- Pipelines that are outside of the scope of these specifications can be assessed on an individual basis; please contact Enduro.
- Tool design may vary from image above.

\* Increased run time available with additional battery packs

Data is subject to change without notice | 22" DdL 0002-4B-25995 Rev. 5  
1/11/2016 - 0002-19-00989 rev 3

**22 inch**

